


Slide Rail

D'Angelo are the innovators in fifth wheel building with our multi-purpose Slide Rail Assembly - you don't need anything else when it comes to a D'Angelo Slide Rail.

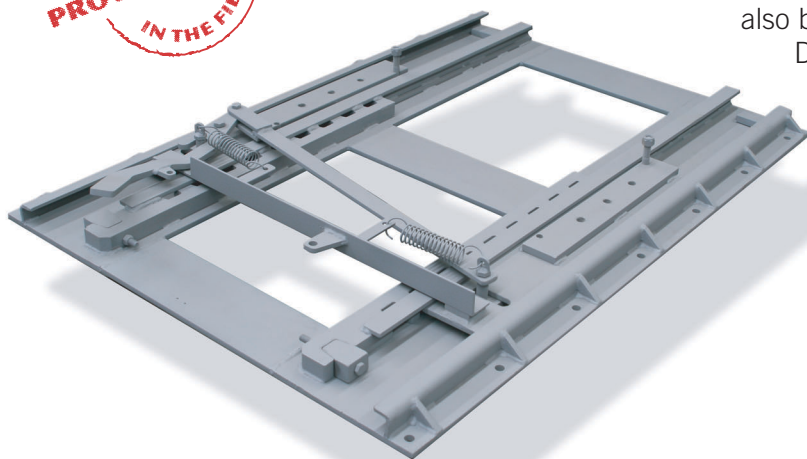

The D'Angelo standard Slide Rail features 9 positions of 75mm increments - a total of 600mm travel and is low profile at 45mm overall to a suit fixed plate. A height of 65mm can also be achieved for ballrace assemblies and the D'Angelo 12" Greasy Plate, which makes the lowest stabilised slider assembly on the market.

For non-standard applications D'Angelo can extend the range of their Slide Rail to 1200mm.

D'Angelo's Slide Rail is one of the strongest in its class with a D-Value of 190kN and comes with a choice of air operated or manual operation release levers.


At a glance

- Suits Fixed, Ballrace or 12" Greasy Plate assemblies
- 600mm (standard) to 1200mm travel in increments of 75mm
- Manual or air-assisted release lever option
- Low-profile fixed slide rail at 45mm and 65mm with Ballrace and Greasy assemblies
- Compatible with loadcell weighing systems

Mounting Assemblies



Fixed Plate



Ballrace Assembly



12" Greasy Plate



Loadcell

Applications

Stock Crate
Semi-Tipper
Tanker
Slide-back Trailers
Low Loader

General Freight
Volume Loading
Mining
Roadtrain
Logging


Specifications

Complies with AS 1773-1990.

Technical Data:

ADR 62/01


D-Value: 190kN
Weight (5ft Slide Rail): 210kg
(7ft Slide Rail): 310kg

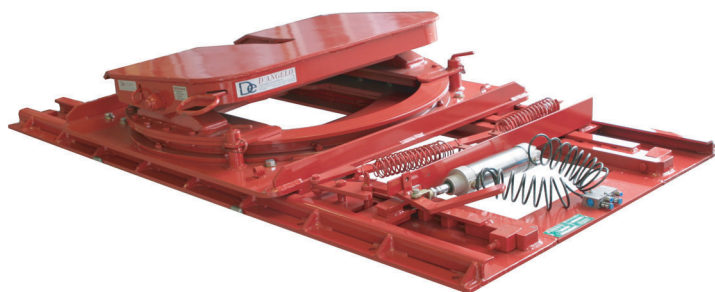

Maxi 50 on single row ballrace slide rail

Designed and manufactured in Australia

126-132 Fitzgerald Road, Laverton North VIC 3026. Ph: +61 3 9369 0633 Fax: +61 3 9369 4717



D'ANGELO

www.dangelo.com.au

MINI FIFTHWHEELS • MAXI FIFTHWHEELS • BALLRACES • SLEWING BEARINGS • SLIDERAILS • GREASY PLATES • TRUCK & TRAILER ACCESSORIES